




КОМПЕНСАТОР PTFE(ПТФЭ)

МОДЕЛЬ NST-PTFEK

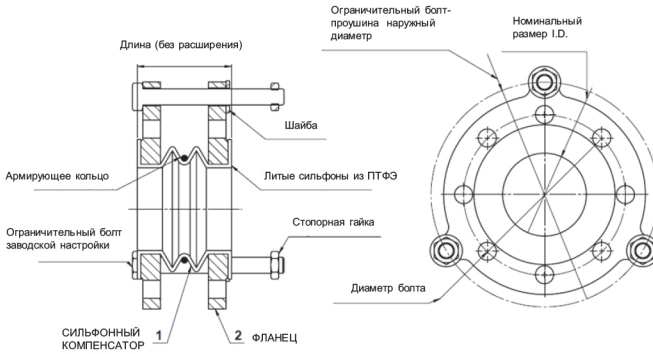

УСЛОВИЯ ЭКСПЛУАТАЦИИ

КЛАСС ДАВЛЕНИЯ	PN16
МАКСИМАЛЬНАЯ ТЕМПЕРАТУРА	200 °C

NO	ОПИСАНИЕ	МАТЕРИАЛ
1	СИЛЬФОННЫЙ КОМПЕНСАТОР	PTFE / ПТФЭ
2	ФЛАНЕЦ	СТАЛЬ St 37.2 ~ SS304 ~SS 316

РАЗМЕР	Длина (Inch)	БОКОВАЯ ЧАСТЬ (Inch)	WT(lbs)	PRESS-70F (psi)	PRESS-200F (psi)	PRESS-300F (psi)	PRESS-400F (psi)
DN25	1 3/8	1/8		170	135	100	70
DN40	1 3/8	1/8	3	170	135	100	70
DN50	1 9/16	1/8	7	170	135	95	65
DN65	2 1/4	1/8	10	165	130	95	65
DN80	2 1/4	3/16	12	165	125	90	60
DN100	2 5/8	1/4	18	160	125	85	60
DN125	3 1/4	1/4	24	155	120	85	60
DN150	2 3/4	1/4	29	150	115	85	55
DN200	4	1/4	47	145	110	80	55
DN250	4 1/4	1/4	64	140	110	80	55
DN300	6	1/4	72	135	105	75	50